


Calpeda GXR Series



- Single impeller submersible pumps in chrome nickel stainless steel.
- Top discharge port.
- For clean water containing solids up to 10 mm grain size.
- For draining rooms or emptying tanks, extraction of water from ponds, streams or pits and for rainwater collection.

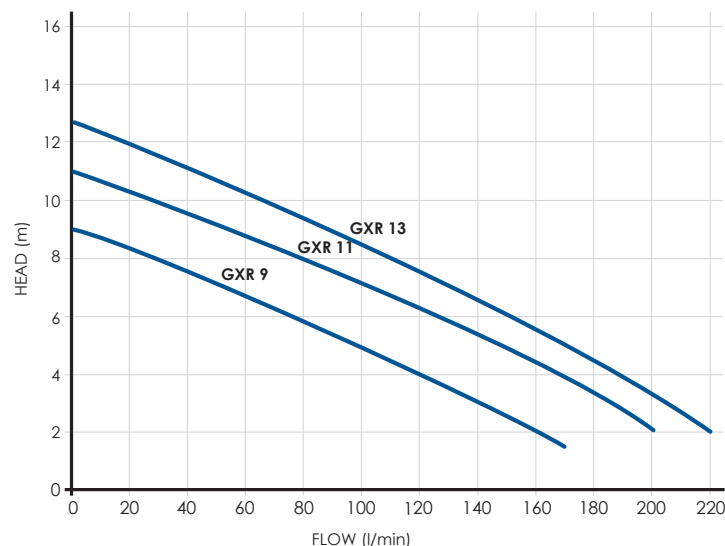

PERFORMANCE GUIDE

Code	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Max Immersion Depth (m)	Outlet (mm)	Max Solid (mm)	Float
PUCALGXRM9SG	9	170	13	5	32	10	N
PUCALGXRM11A	11	200	16	5	32	10	Y
PUCALGXRM13A	13	220	18	5	32	10	Y

ELECTRICAL DATA


Code	Current Type	kW	Hp	Amps	RPM/min	Capacitor (μF)	Insulation Class	Voltage (V)	Frequency (Hz)
PUCALGXRM9SG	Single	0.25	0.33	2.5	2900	8	F	230	50
PUCALGXRM11A	Single	0.37	0.5	3.5	2900	12.5	F	230	50
PUCALGXRM13A	Single	0.45	0.6	4.5	2900	16	F	230	50



Calpeda GXR Series



- Single impeller submersible pumps in chrome nickel stainless steel
- Top discharge port
- For clean water containing solids up to 10 mm grain size
- For draining rooms or emptying tanks, extraction of water from ponds, streams or pits and for rainwater collection

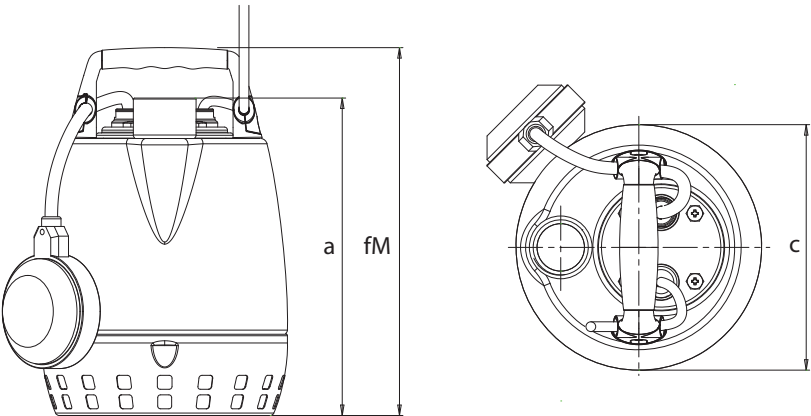

PERFORMANCE GUIDE				
Code	fM (mm)	a (mm)	c (mm)	Weight (kg)
PUCALGXRM9SG	265	230	176	5.2
PUCALGXRM11A	300	265	176	6.5
PUCALGXRM13A	300	265	176	7.2

