

Flow Aids - U Aerator Nozzle




- Constant injection of low pressure air
- Mounted externally and suitable for retro fitting
- Suitable for fine dry powders i.e cement, lime
- Ideal for silos and hopper emptying, big bag emptying and filter cleaning



FLOW AIDS - AERATORS - U	
Type	Fluidiser
Application	Hopper and silos - piping
Powder	Fine and dry powders
Solves	Bridging, rat holing
Duty Cycle	Continuous
Working Pressure	0.2 to 1 bar (2.9 to 14 psi)
Working Temperature	-20 to 80 °C
Materials	Ring carbon steel, Supralen PE filter, Polyamide body

U - DIMENSIONS		
Code	A	B Ø
VOLIUIO60	48	66

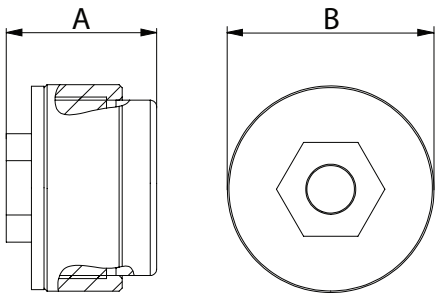

All data, performance curves, and dimensions provided are for general guidance only. Performance may vary depending on operating conditions and fluid properties. Refer to the product manual for complete specifications, installation requirements, and confirmed dimensions. Specifications are subject to change without notice.

AA101

