


# GPS EUB Contractors Pump



- **Pump type:** submersible drainage pump for site drainage and flood water removal.
- Designed for water removal on construction sites, excavations and flooded areas.
- Handles abrasive liquids containing sand and light solids in harsh site conditions.
- Robust construction for reliable operation in contractor and civil applications.
- **Applications:** site drainage (dewatering), construction sites, trenches, pits, floodwater removal and general dirty water transfer.

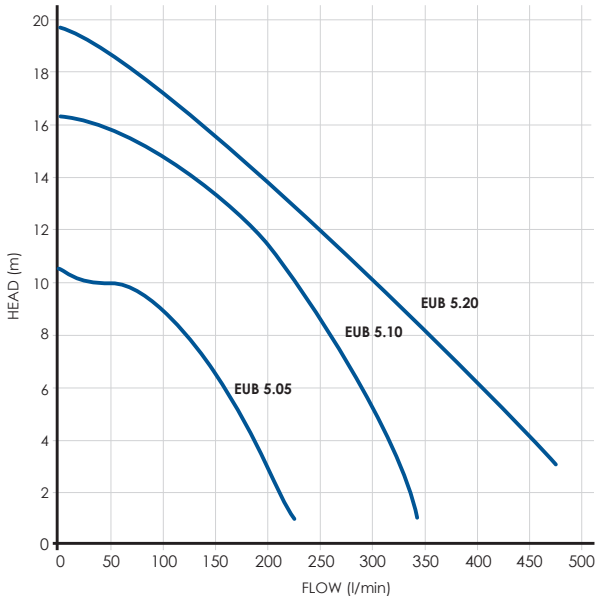

## PERFORMANCE GUIDE


| Code             | Max Head (m) | Max Flow (l/min) | Max Pressure (psi) | Outlet (mm) | Float Switch |
|------------------|--------------|------------------|--------------------|-------------|--------------|
| PUGLO50EUB-5.05A | 10           | 225              | 14                 | 50          | Y            |
| PUGLO50EUB-5.10  | 16           | 300              | 23                 | 50          | N            |
| PUGLO50EUB-5.10A | 16           | 300              | 23                 | 50          | Y            |
| PUGLO50EUB-5.20A | 21           | 500              | 30                 | 50          | Y            |

## ELECTRICAL DATA

| Code             | Current Type | kW   | Hp  | Amps | RPM/min | Insulation Class | Voltage (V) | Frequency (Hz) |
|------------------|--------------|------|-----|------|---------|------------------|-------------|----------------|
| PUGLO50EUB-5.05A | Single       | 0.37 | 0.5 | 3    | 2850    | F                | 230         | 50             |
| PUGLO50EUB-5.10  | Single       | 0.75 | 1   | 6    | 2850    | F                | 230         | 50             |
| PUGLO50EUB-5.10A | Single       | 0.75 | 1   | 6    | 2850    | F                | 230         | 50             |
| PUGLO50EUB-5.20A | Single       | 1.5  | 2   | 9.2  | 2850    | F                | 230         | 50             |



# GPS EUB Contractors Pump

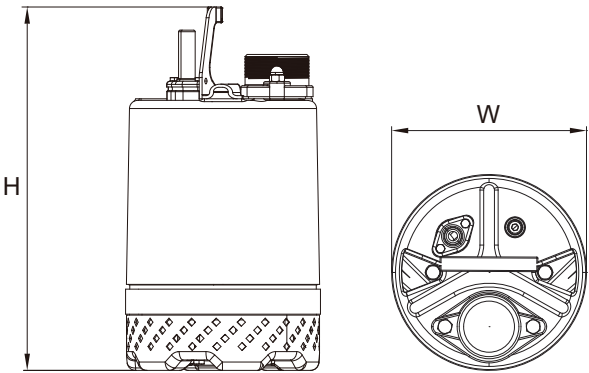

| DIMENSIONS + WEIGHTS |           |           |                |
|----------------------|-----------|-----------|----------------|
| Code                 | H<br>(mm) | W<br>(mm) | Weight<br>(kg) |
| PUGLO50EUB-5.05A     | 345       | 188       | 12.8           |
| PUGLO50EUB-5.10      | 370       | 188       | 15.5           |
| PUGLO50EUB-5.10A     | 370       | 188       | 15.5           |
| PUGLO50EUB-5.20A     | 475       | 225       | 21.1           |

All data, performance curves and dimensions provided are for general guidance only. Performance may vary depending on operating conditions and fluid properties. Refer to the product manual for complete specifications, installation requirements and confirmed dimensions. Specifications may change without notice.

AA73

